

# iPad Case Privacy Screen Removal & Installation Instructions



## OVERVIEW DESCRIPTION


Removing splash proof screen and installing new privacy screen for iPad case.




01 Removing Case



02 Removing Splash Proof Screen

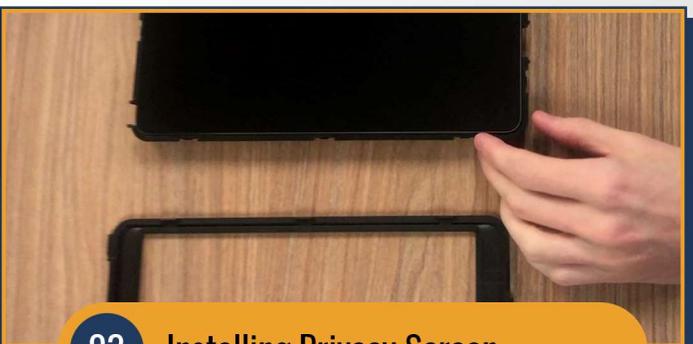


03 Installing Privacy Screen

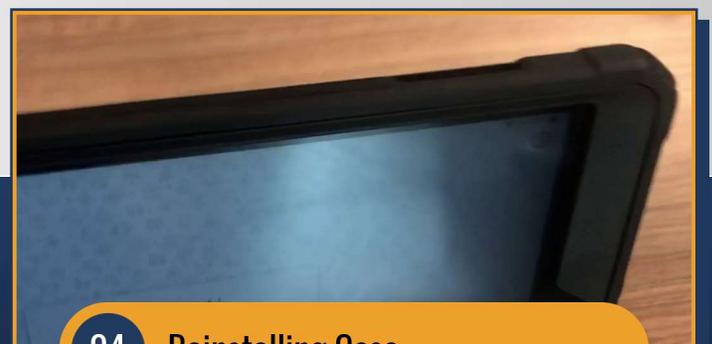

04 Reinstalling Case

## STEP 01

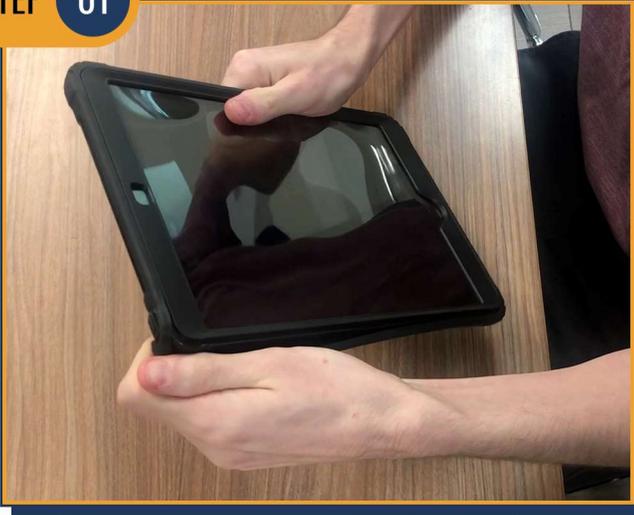


### Remove outer protective cover.

To remove the soft rubber cover from the outside of the case, use nails or a thin non-sharp object (e.g. credit card) to pry in between soft rubber cover and hard shell.

Gently pull the rest of the outer layer off the iPad, taking care to free the flaps of ports first.


## STEP 02

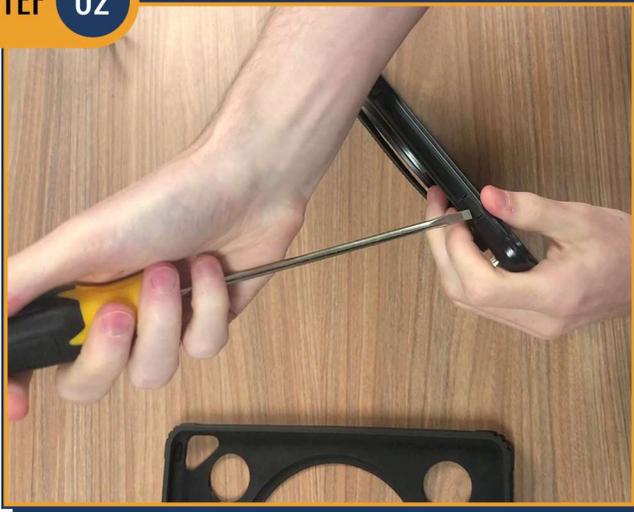

### Removing Splash Proof Layer

To remove the splash proof layer, you need to unhinge the tabs on all sides of the iPad. You can use a flathead screwdriver or the edge of a credit card to unlock the tabs from the case. Please take care not to put too much pressure or break the tabs.

## STEP 03

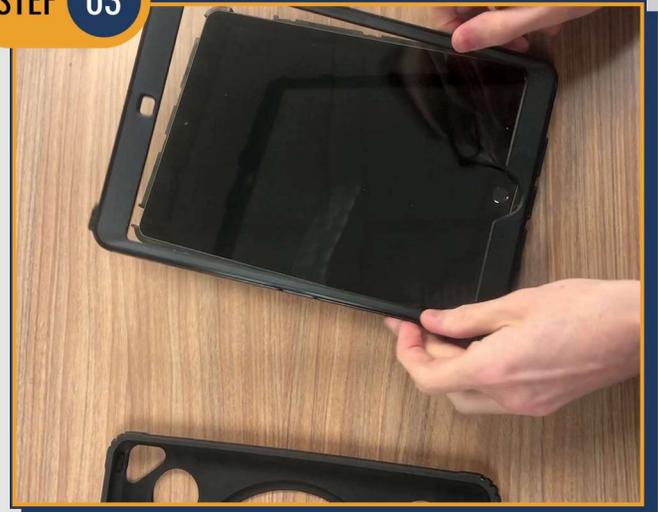

### Set aside all pieces.

The only piece you need to work with for the next step is the splash proof layer. Keep iPad in hard outer shell, set it and the soft rubber cover aside.

# REMOVING SPLASH PROOF SCREEN

ZENXEON  
TECHNOLOGIES

REMOVING SPLASH  
PROOF SCREEN | 02


## STEP 01



### Remove splash proof screen.

To remove the splash proof screen, gently push at one edge to pop the screen off the case.

## STEP 02

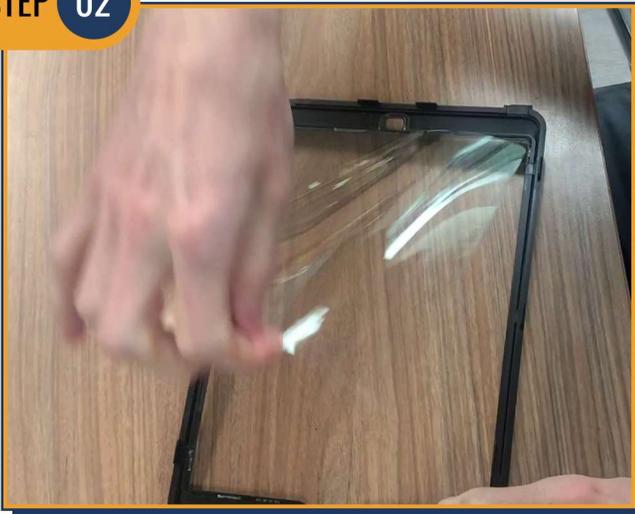

### Pop off all edges.

Circle around entire screen to pop off all edges. Pull off all glue remaining on screen protector.


## STEP 03



### Remove screen and glue.

After fully removing the screen, there might be glue left behind on the outer shell. Gently pull off with fingers until all glue has been removed.


## STEP 01

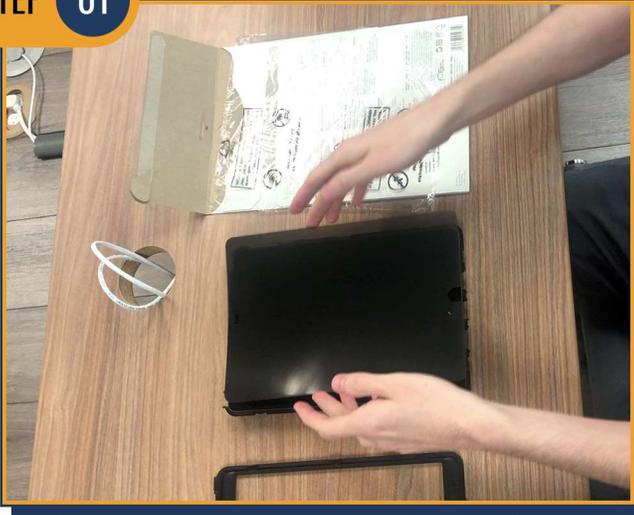

### Place privacy screen on iPad.

Place privacy screen on top of the iPad, still in the hard protective shell. Make sure to line up home button and speaker notches with the iPad.


## STEP 02

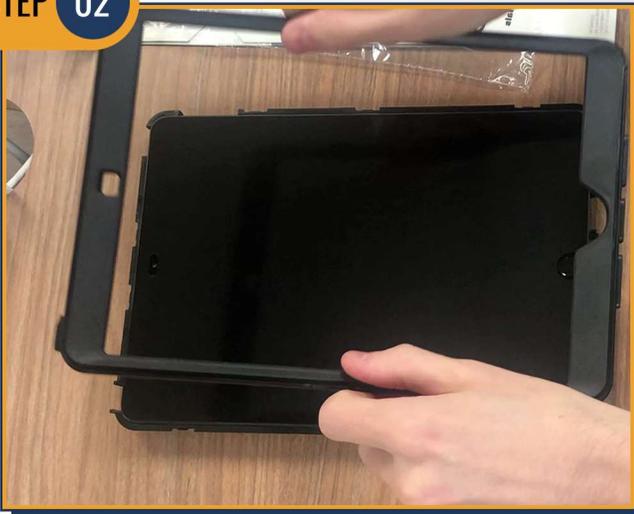

### Snap cover back in place.

Snap cover back in place, making sure all tabs lock into place.

## STEP 03

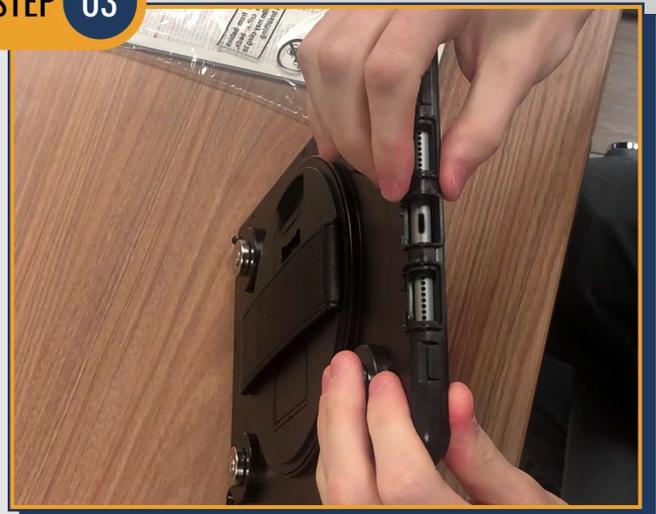

### Replace soft rubber cover.

Replace soft rubber cover around hard outer shell.